


# High Compression Anti Vibration Rubber Cork Sheeting

Product Code: RC0306-04

## Product Description

Our high compression cork sheeting is suitable for use in low to medium bolt pressure applications. It also features excellent anti-vibration properties for use as a gasketing material or as isolation pads. This particular rubber bonded cork material combines durable mechanical properties with flexibility in a single package.

## Technical Specification

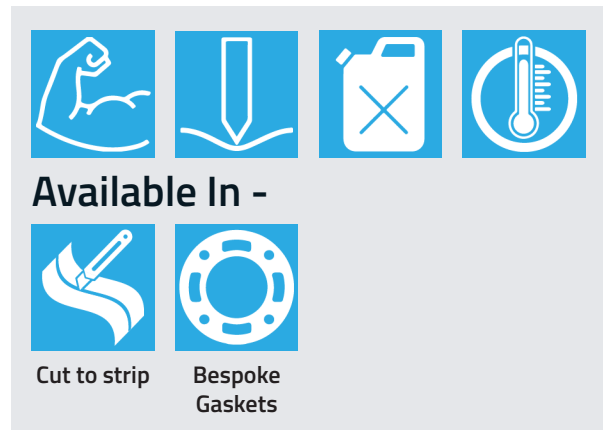

Properties	Values
Colour	Black with cork points
Cork Granule Size	1mm to 2mm
Binder	Synthetic Rubber
Hardness (Shore A)	55° - 70°
Compression at 400 PSI	30% - 50%
Recovery	> 80%
Tensile Strength	23.5 kg/cm <sup>2</sup>
<b>Test According To ASTM F104</b>	
Volume Change After Immersion	
ASTM Oil 1 (70hrs @ 100 °C)	-5% to +10%
ASTM Oil 3 (70hrs @ 100 °C)	-10 to +40%
ASTM Fuel (22hrs @ 23 °C)	-2 to +10%
Working Temperature	-60 to +350 °C

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.