


Low Compression Anti Vibration Rubber Cork Sheeting

Product Code: RC0306-06

Product Description

Our low compression, anti-vibration rubber cork sheeting is the ideal material for noise and vibration control in a variety of applications. This particular material is manufactured using a combination of cork granules with a nitrile rubber binder. It also offers excellent oil and fuel resistance.

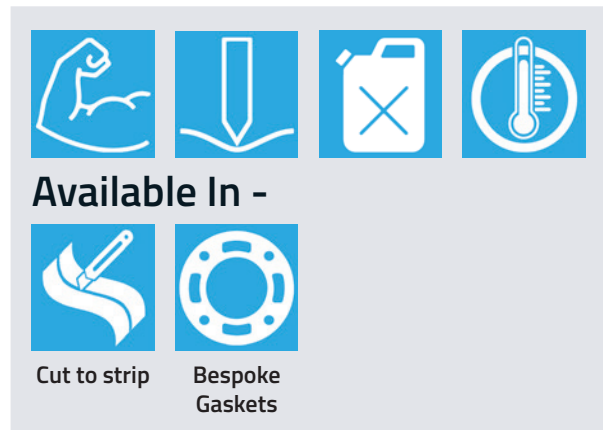

Technical Specification

Properties	Values
Colour	Red with cork points
Cork Granule Size	0.5 - 1mm
Binder	Nitrile Rubber
Hardness (Shore A)	65 - 75°
Compression at 400 PSI	25 - 35%
Recovery	80%
Tensile Strength	23.5 kg/cm ²
Test According To ASTM F104	
Volume Change After Immersion	
ASTM Oil 1 (70hrs @ 100 °C)	-2 to +10%
ASTM Oil 3 (70hrs @ 100 °C)	-2 to +15%
ASTM Fuel (22hrs @ room temperature)	-2 to +10%
Working Temperature	-60 to +350 °C
Temperature Range	
-20 °C to +120 °C	
Thermal Conductivity	0.79 w/m oc

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.